





BCMA Series

FEATURES

- Impedance variation: Extensive lineup are available for compatibility with various usages
- Common mode filters for Signal Line
- Operating temperature range: -40 to +125 °C
- AEC-Q200 qualified
- Quantity: 500pcs



APPLICATION


- Radiated noise suppression for car multimedia interfaces (MOST, USB2.0, IDB-1394, etc.)



Part No	Z @ 100 MHz Min. (Ω)	Z @ 100 MHz Typ. (Ω)	I _R Max. (mA)	R _{DC} Max. (Ω)	V _{DC} Max. (Volts)	I _R Min. (Ω)
BCMA4532-900N	68	90	4000	0.050	50	10M
BCMA4532-231N	173	230	3500	0.050	50	10M
BCMA4532-601N	450	600	2500	0.060	50	10M
BCMA4532-901N	650	900	2300	0.070	50	10M
BCMA4532-142N	1000	1400	2000	0.100	50	10M
BCMA4532-282N	2100	2800	900	0.350	50	10M






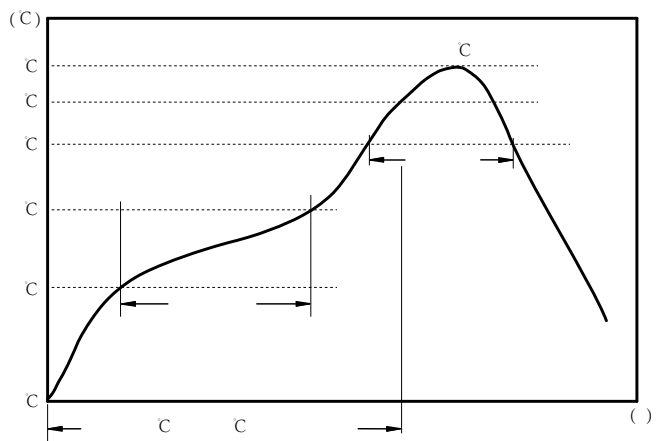


C
C
C

:




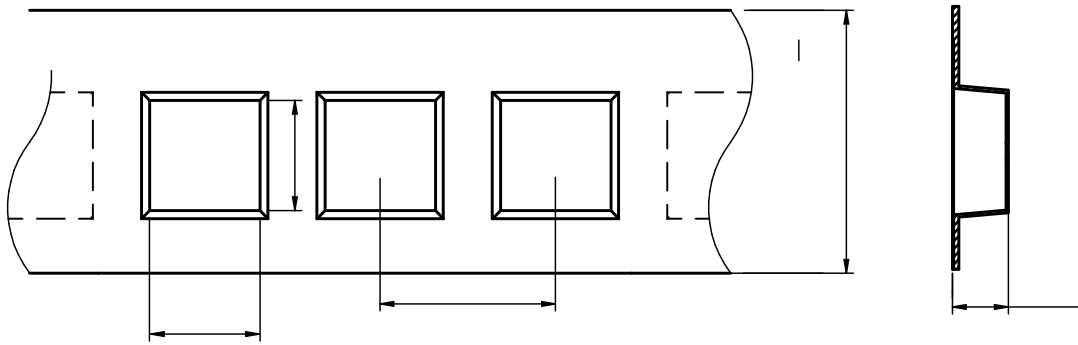


BCMA4532	3.6 ± 0.1	4.9 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	8.0 ± 0.1	12.0 ± 0.3	3.0 ± 0.1	1.75 ± 0.1	0.26 ± 0.05

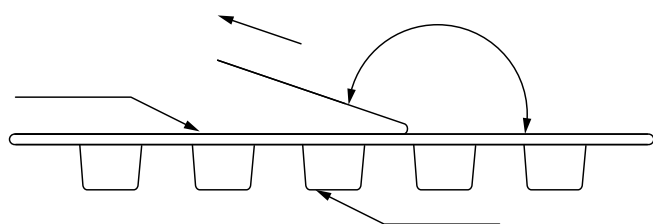


The peel force of top cover tape shall be between 0.15 to 0.78 N


:

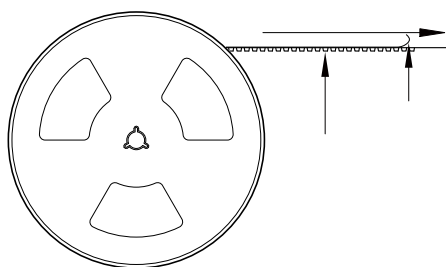

500 Pcs/Reel



4 Reel /Inner box(2K Pcs)



8 Inner box/Carton box(16K Pcs)

:

•

•

•

•

•

•

•

•

•

•

•

•

•