

FBHE Series




CHARACTERISTICS

- Monolithic inorganic material construction.
- Closed magnetic circuit avoids crosstalk.
- Suitable for reflow soldering.
- Available in various sizes.
- Quantity: 10000pcs

APPLICATION

- Data lines and low power line
- Connection between digital and analog circuit

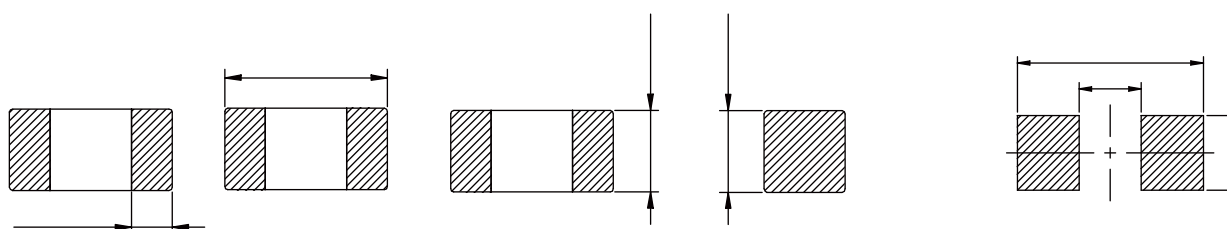

Part No	Impedance @100MHz (Ω)	Tolerance	DCR (max) (Ω)	Temperature Rise Current (max) (mA)
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		

Operating Temperature: -55 °C ~ +125 °C

Temperature rise current the actual value of DC current when the temperature rise is ΔT40 °C

