


MDA HT Series

SMD Low Profile High Current Molded Inductor

Size 4020




FEATURES

- Low loss realized with low DCR.
- $\text{SR}_{\text{POT}} \text{ PUX } \text{d} \text{aa } \text{Q} \text{u} \text{σ} \text{S} \text{ } \text{S} \text{H} \text{S} \text{ } \text{u} \text{u} \text{ } \text{O} \text{u} \text{P} \text{u} \text{σ} \text{u} \text{S} \text{ } \text{O} \text{u} \text{σ} \text{u} \text{O} \text{f} \text{u} \text{O} \text{ } .$
- 100% Lead(Pb)-Free and RoHS compliant.
- High performance (Isat) realized by metal dust core.
- $!9/ \text{v} \text{ } \xi \text{H} \text{t} \text{P} \text{u} \text{S} \text{S} \text{ } .$
- $\text{h} \mu \text{S} \text{o} \text{t} \text{f} \text{ } ^\circ \text{ } \text{u} \text{S} \text{P} \text{u} \text{S} \text{o} \text{t} \text{u} \text{H} \text{o} \text{S} \text{ } \text{u} \text{u} \text{ } / \text{ } \text{Q} \text{O} \text{P} \text{H} \text{S} \text{Q} \text{ } \text{σ} \text{S} \text{P} \text{u} \text{ } \text{u} \text{S} \text{P} \text{u} \text{S} \text{o} \text{t} \text{u} \text{H} \text{o} \text{S} \text{ } \text{o} \text{u} \text{σ} \text{S} \text{ } .$
- $\text{v} \text{H} \text{t} \text{Q} \text{f} \text{u} \text{b} \text{l} \text{ } \text{t} / \{$


APPLICATION

- $\text{I} \text{S} \text{t} \text{S} \text{P} \text{t} \text{P} \text{u} \text{S} \text{ } \text{u} \text{t} \text{P} \text{P} \text{t} \text{P} \text{u} \text{S} \text{ } \text{t} \text{Q} \text{S} \text{ } \text{Q} \text{u} \text{S} \text{o} \text{u} \text{O} \text{ } \text{P} \text{u} \text{ } ^\circ \text{f} \text{ } ^\circ$
- HVAC
- $\text{S} \text{u} \text{u} \text{o} \text{o} \text{ } \text{X} \text{Q} \text{S} \text{u} \text{X} \text{P} \text{u} \text{ } \text{t} \text{Q} \text{S} \text{ } \text{σ} \text{S} \text{t} \text{u} \text{ } \text{O} \text{u} \text{σ} \text{u} \text{O} \text{P} \text{ } .$
- Audio subsystem
- Digital instrument cluster
- $\text{LQ} \text{ } ^\circ \text{S} \text{H} \text{O} \text{P} \text{S} \text{ } \text{LQ} \text{u} \text{u} \text{u} \text{t} \text{Q} \text{u} \text{P} \text{S} \text{Q} \text{u} \text{ } \text{t} \text{Q} \text{S} \text{ } \text{Q} \text{t} \text{Q} \text{u} \text{ } \text{t} \text{f} \text{u} \text{O} \text{ } .$

Dimensions: [mm]

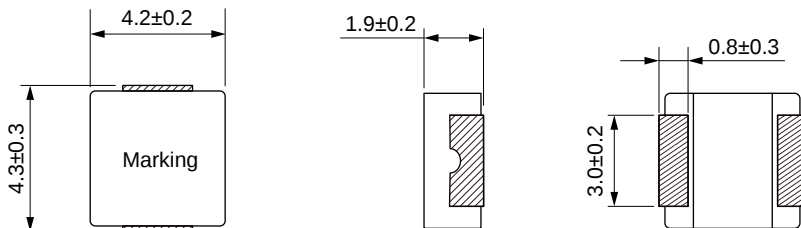










Land Pattern: [mm]








Electrical Properties:


	(μH)		(A)	(A)	Satura on (A)	Satura on (A)	(mΩ)	(mΩ)
MDA4020HT-R10M	0.10	±20%	19.0	18.0	32.2	32.0	1.9	2.3
MDA4020HT-R15M	0.15	±20%	16.5	15.0	26.2	26.0	3.1	3.8
MDA4020HT-R33M	0.33	±20%	15.0	13.0	13.3	13.0	5.0	5.8
MDA4020HT-R47M	0.47	±20%	13.0	11.0	11.3	11.0	6.0	7.2
MDA4020HT-R68M	0.68	±20%	11.0	10.0	10.2	10.0	8.2	9.9
MDA4020HT-1R0M	1.00	±20%	10.0	9.5	10.0	9.5	11.5	13.8
MDA4020HT-1R5M	1.50	±20%	9.0	8.0	9.0	8.0	15.4	18.5
MDA4020HT-2R2M	2.20	±20%	7.2	6.5	6.4	6.2	25.0	30.0
MDA4020HT-3R3M	3.30	±20%	5.5	5.0	6.3	6.2	41.0	49.2

Typical Electrical Characteristics:

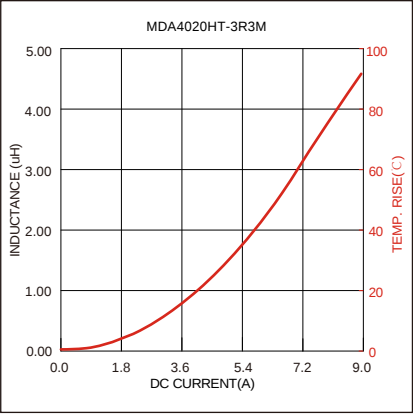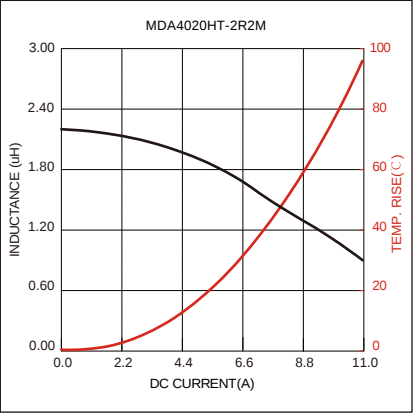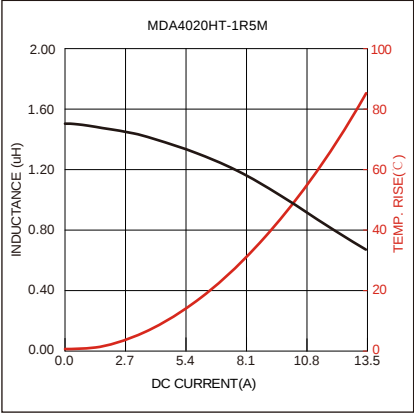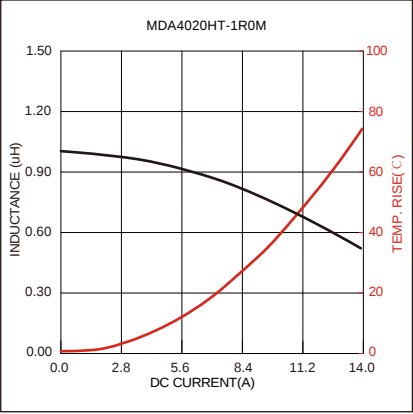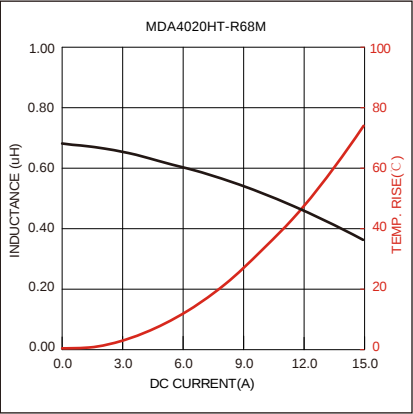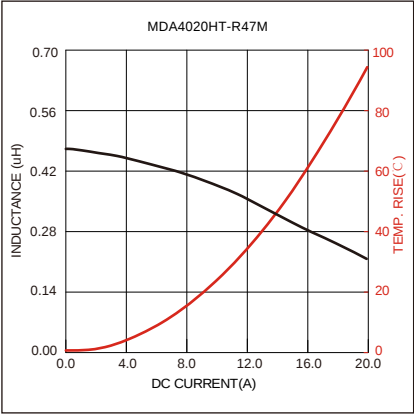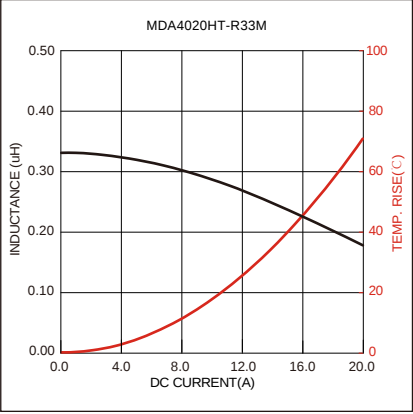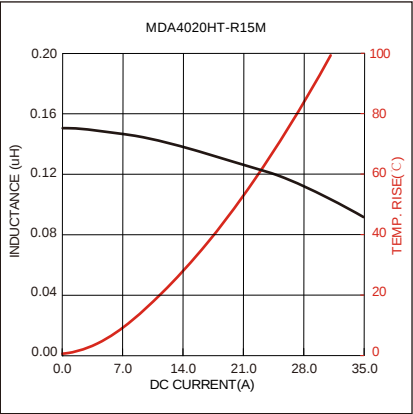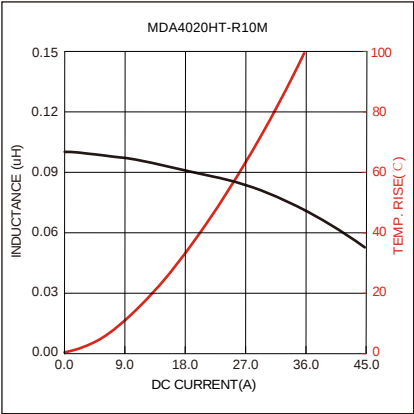

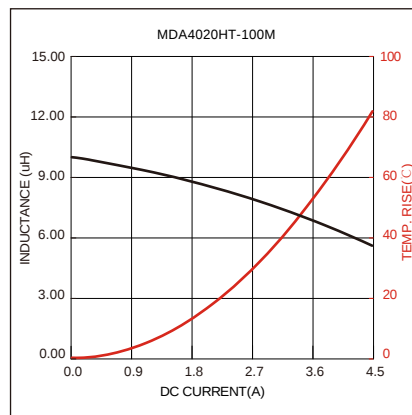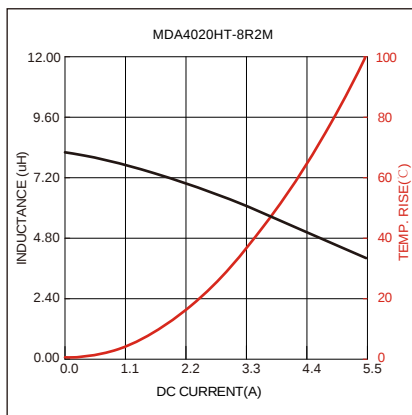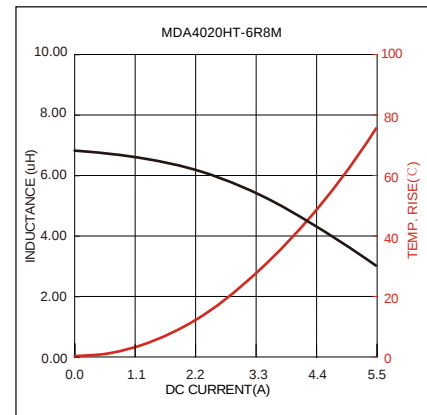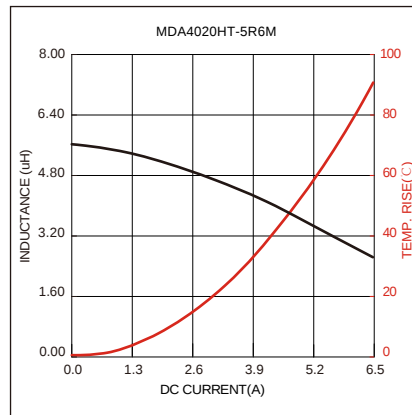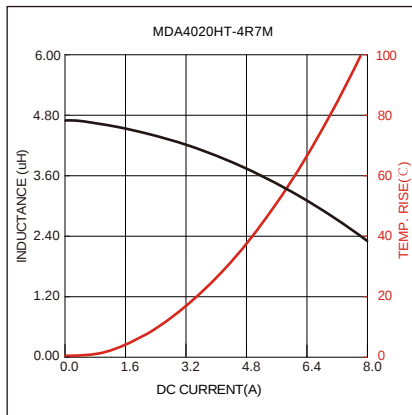


Soldering Reflow:

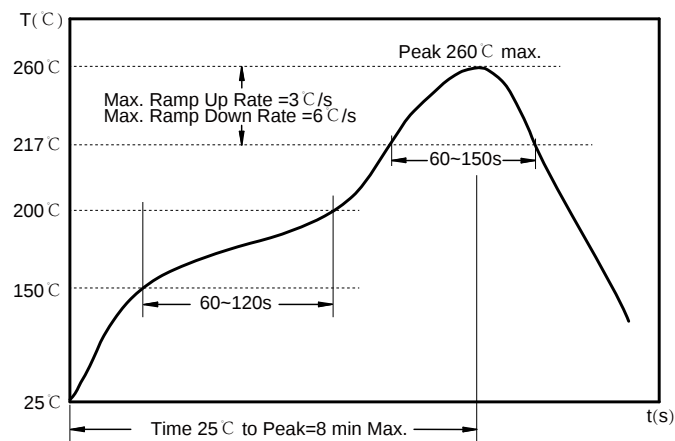

Preheat condition: $150 \sim 200^{\circ}\text{C} / 60 \sim 120 \text{ sec.}$
Allowed time above 217°C : 60~150 sec.
Max temperature: 260°C .
Allowed Reflow time: 3x max.


Packaging Information:

Tape Dimension :

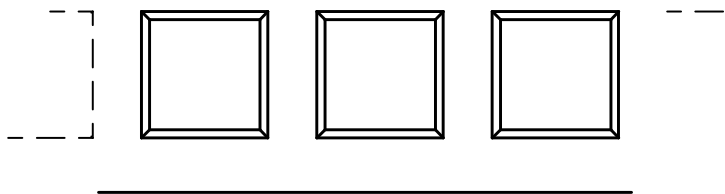

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)
MDA4020HT	4.6 ± 0.1	4.9 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	8.0 ± 0.1	12 ± 0.3	2.3 ± 0.1	1.75 ± 0.1

Peel force of top cover tape:

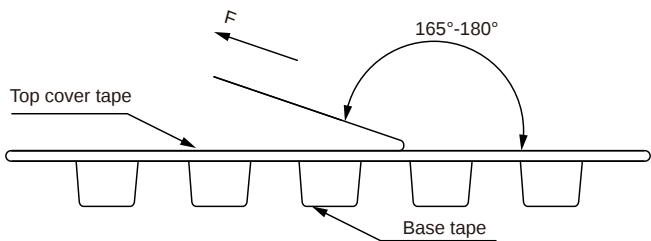


The peel force of top cover tape shall be between 0.1 to 1.3 N


Product Marking:

Marking	Printing Inductance)
---------	----------------------

Reel Dimension: [mm]

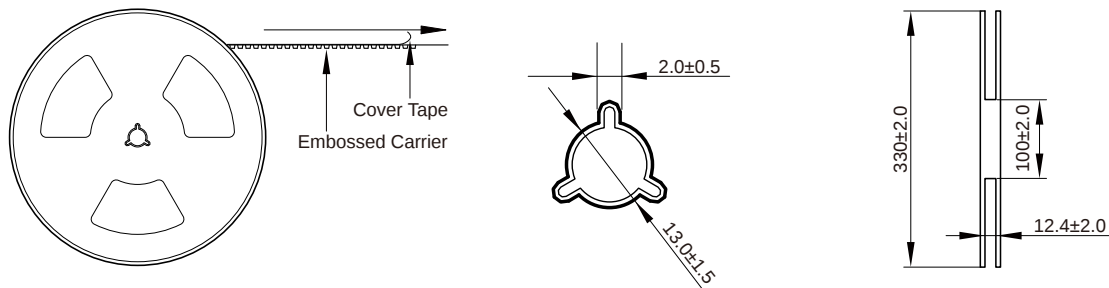

Packaging Quantity:

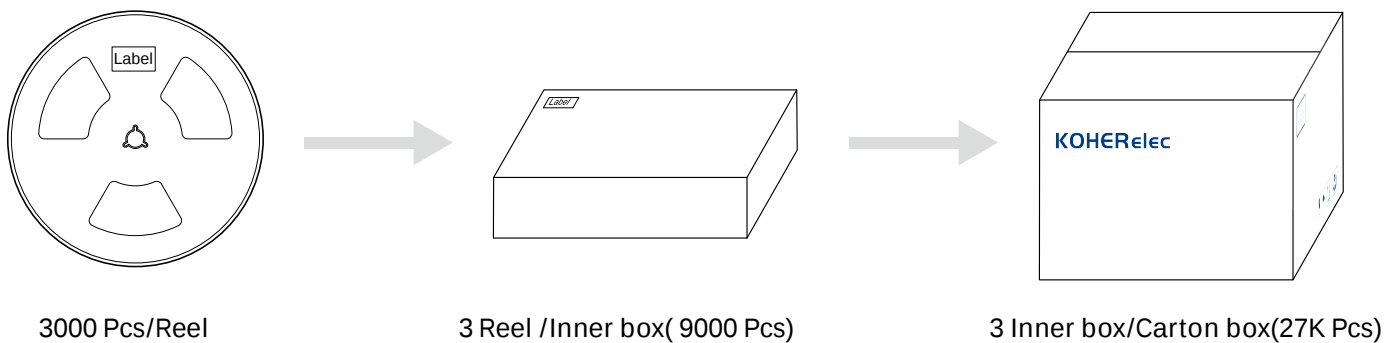

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.