


## MDE Series




### FEATURES

- High rated current
- Frequency up to 3 MHz
- 125 °C
- Low core loss
- 
- Halogen Free & ROHS compliant
- 
- 

### APPLICATION

- 
- Switch and servers
- 
- 
- 
- SSD modules

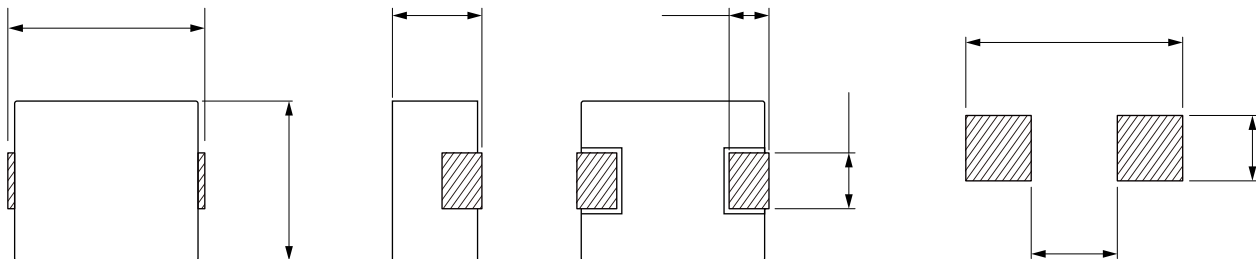

|  | ( $\mu$ H) |  | (m $\Omega$ ) | Saturation |  |
|--|------------|--|---------------|------------|--|
|  |            |  |               |            |  |
|  |            |  |               | 22.5       |  |
|  |            |  | 13.5          |            |  |
|  |            |  |               | 13.5       |  |
|  |            |  |               | 12.5       |  |
|  |            |  |               |            |  |
|  |            |  |               |            |  |
|  |            |  | 39.5          |            |  |
|  |            |  |               |            |  |
|  |            |  |               |            |  |
|  |            |  |               |            |  |
|  |            |  | 235           |            |  |
|  |            |  |               |            |  |



