


SCM Series







FEATURES

-
-
-
-

°C


APPLICATIONS

-
-




Part No	Impedance @ 100 MHz Min.	Impedance @ 100 MHz Typ.	DC Resistance Max.	Temperature Rise Current Max. (A)	Rated Volt Max. (V)	IR Min.
SCM1513-301Y	225	300	5.0	13.0	80	10
SCM1513-501Y	400	500	6.0	10.0	80	10
SCM1513-551Y	400	550	6.0	10.0	80	10
SCM1513-601Y	500	600	7.0	10.0	80	10
SCM1513-701Y	500	700	7.0	10.0	80	10
SCM1513-102Y	800	1000	10.0	9.0	80	10
SCM1513-152Y	1200	1500	23.0	5.0	80	10

△

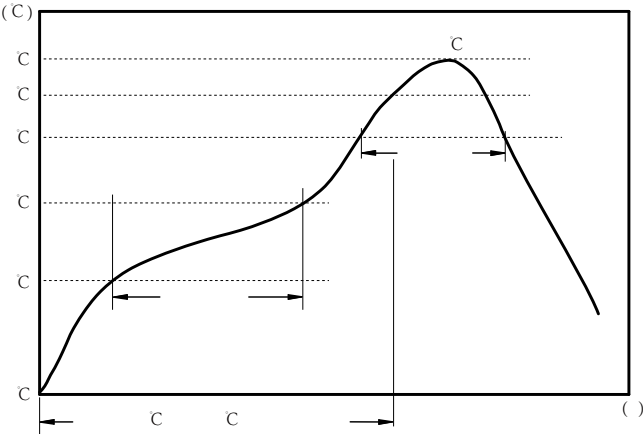


C
C
C

:

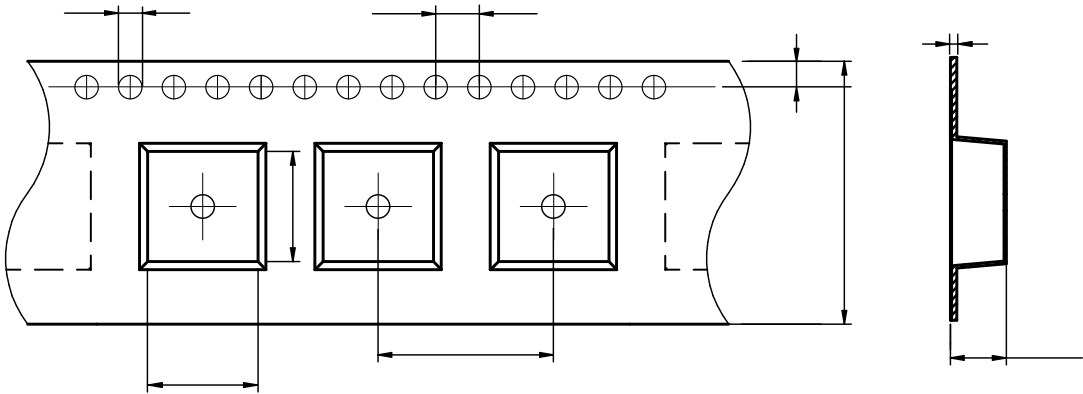


SCM1513	14.0±0.1	16.0±0.1	1.5±0.1	4.0±0.1	20.0±0.1	24.0±0.3	6.2±0.1	1.75±0.1	0.40±0.05

Marking	Printing (Impedance)
---------	----------------------

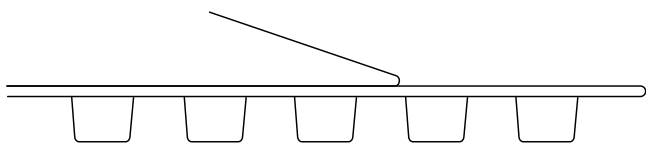

:

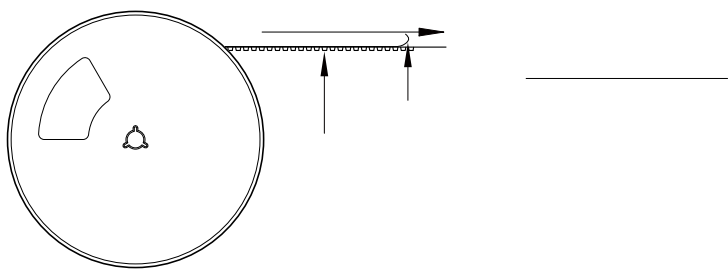

:

•

•

•

•

•

•

•

•

•

•

•

•

•