

SCM Series

FEATURES





-
-
-
-
- Quan ty: 2000PCS

APPLICATIONS



-
-
-




C

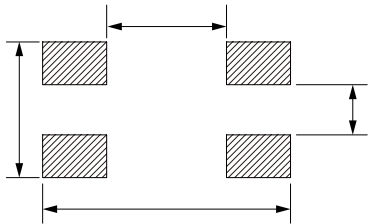



Part No	Impedance @ 100 MHz	Tolerance	DC Resistance Max.	Rated Current Max.	Rated Volt Max.	Withstand Volt Max.	IR Min.
SCM3216-900-04	90	±25%	0.30	400	50	125	10
SCM3216-121-03	120	±25%	0.30	350	50	125	10
SCM3216-161-03	160	±25%	0.40	350	50	125	10
SCM3216-221-03	220	±25%	0.45	300	50	125	10
SCM3216-261-03	260	±25%	0.50	300	50	125	10
SCM3216-361-03	360	±25%	0.60	300	50	125	10
SCM3216-601-03	600	±25%	0.80	300	50	125	10
SCM3216-102-02	1000	±25%	1.00	200	50	125	10
SCM3216-222-02	2200	±25%	1.20	200	50	125	10

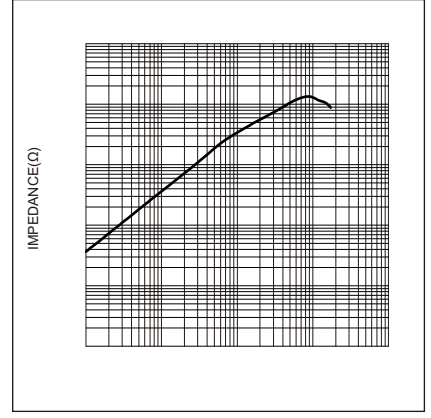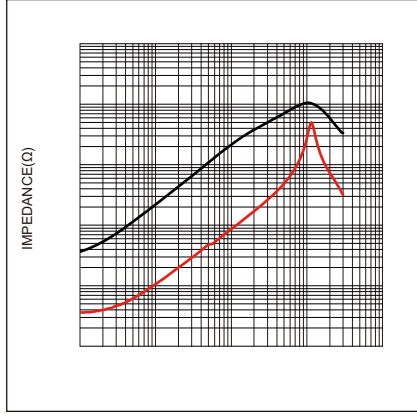

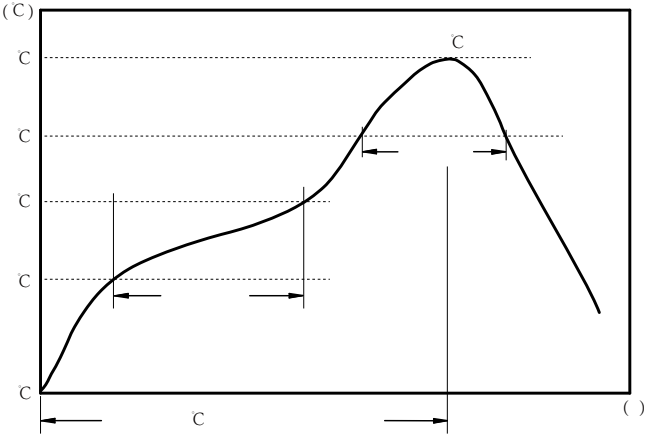


C
C
C

:




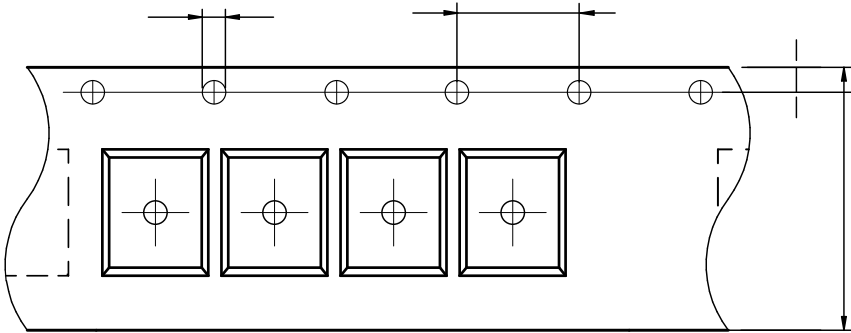


SCM3216	1.88 typ.	3.50 typ.	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.3	2.1 typ.	1.75±0.1	0.22±0.1

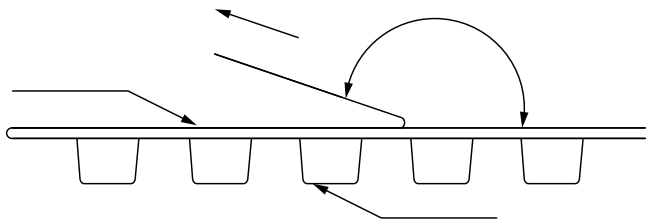


The peel force of top cover tape shall be between 0.1 to 1.0 N


:

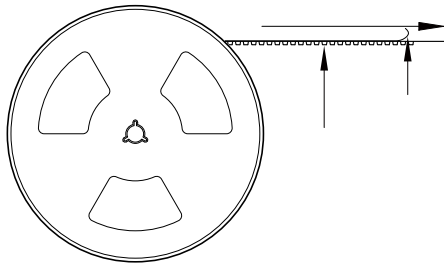

2000 Pcs/Reel



5 Reel /Inner box(10K Pcs)



8 Inner box/Carton box(80K Pcs)

:

•

•

•

•

•

•

•

•

•

•

•

•

•